


Legate Smart Doorbell Standard Wired

ORIGINALITY DESIGN SMART - AND BEAUTIFUL



QUICK GUIDE

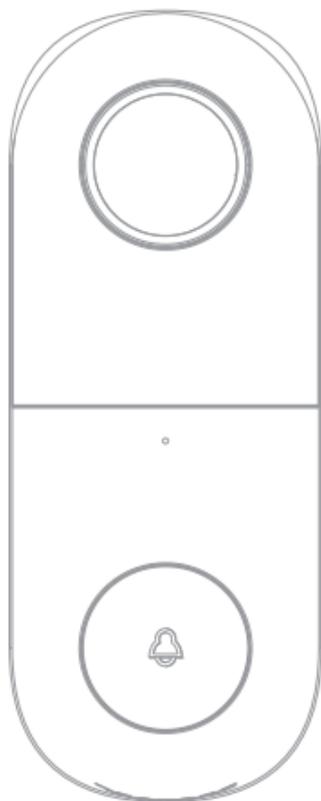

LEGATE[™]
Smart home

What's in the box?

Please consult this checklist for all parts.



Bell 5C



Bracket



Chime kit



Angle Wall Mount



Screw(3 kinds)



Pin




3M



I/M



Screwdriver

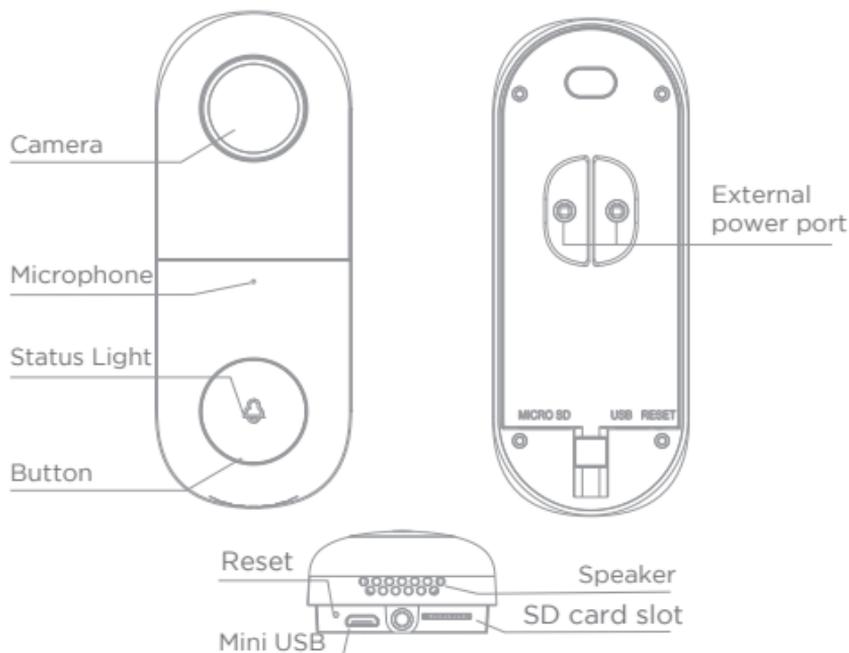

Description

Power Port AC 12V-24V

Doorbell button Press the button to activate the doorbell

Status light

- Red light solid on: the camera network is abnormal
- Red light blinking: awaiting WiFi connection, or currently connecting (faster blinking)
- Blue light solid on: camera running correctly


Microphone Captures sound for your video

SD card slot Supports local SD Card storage (Max.128G)


Reset1 Press and hold on for 5 seconds with pin to reset the doorbell (unable to unbind the bell from account)

Install

Mode 1 Doorbell General Installation

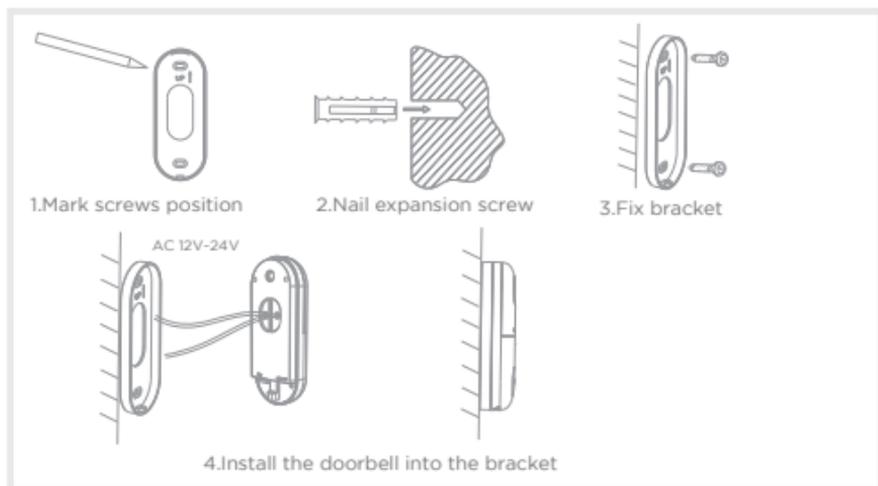

Mode 2 Angle Wall Mount + bracket + doorbell installation

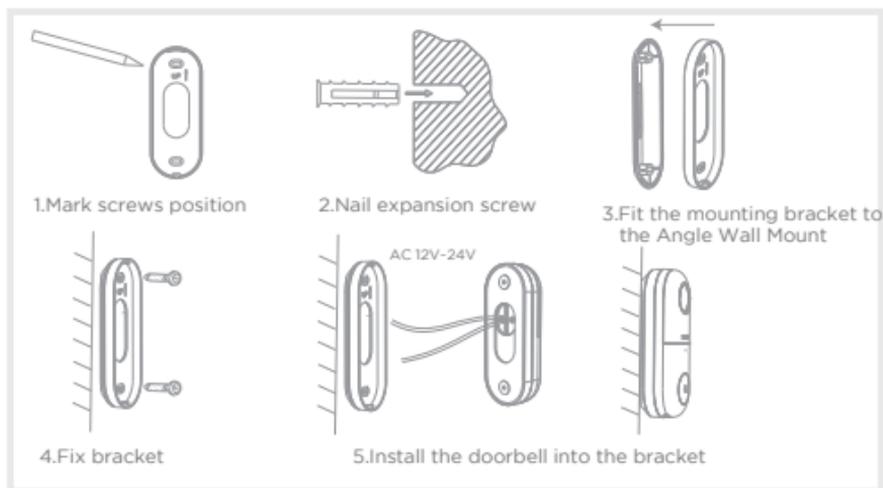

Connect

Download

Legate Smart Home is available for both iOS and Android OS. Search the name "Legate Smart Home" in App Store or Google Play, or scan upper QR-Code to download the App.

Support



iOS



Android



Download App (iOS & Android)



Set up router

This device only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as -!@#\$\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.



Registration Process

- Step 1** Open the Legate Smart Home App, click “Register”, read the “Privacy Policy” and click “Agree”.

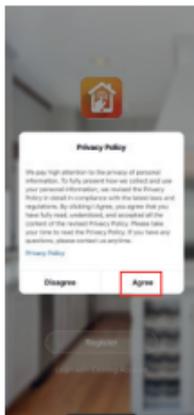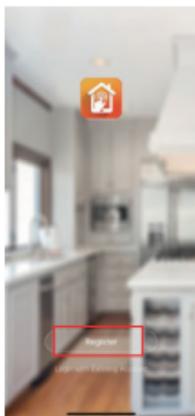

- Step 2** input a legal and valid Mobile number or Email address and click “Continue”. Input Verification Code, then log in the app.

Register

Canada +1



Mobile number/Email

Continue



I agree with Service Agreement and Privacy Policy

Verification Code



Verification code has been sent to: admin@gmail.com,
Resend (56s)

QR Code Configuration

- 1 Open the Legate Smart Home App, click "Create family", and you can customize the Family name and related settings .

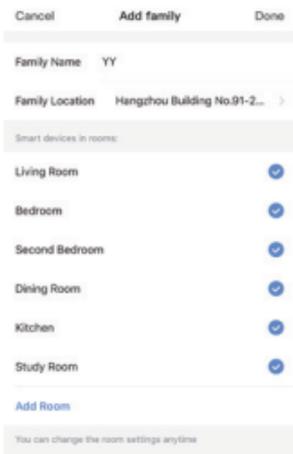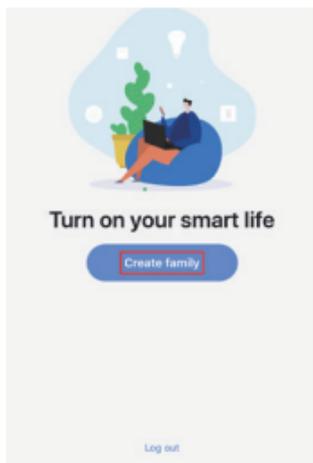


- 1 Continue to click "Security & Sensor" >> "Smart Camera", and then choose "Add Device" or "+", ready to add camera.

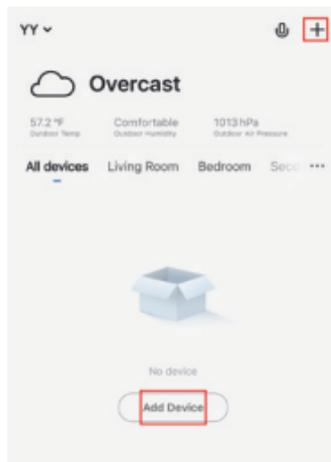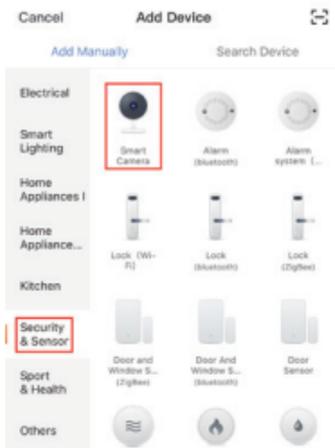

- 3 In "Add Device" this interface,continue to click "next step",and then you should input your WiFi's passwords.

Add Device

Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard

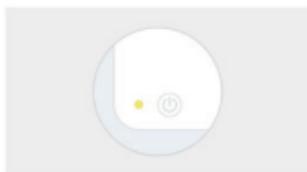

Help

next step

Enter Wi-Fi Password

Only support 2.4GHz Wi-Fi network



OK


Note:

- 1) Camera only supports 2.4GHz WiFi network.
- 2) The number of bits in the ssid and passwords of the router should not exceed 24 digits.

- 4 In this interface, you should scan the QR code in your phone with the camera, when the camera comes out "dong dong dong". And you can complete the configuration about 30s.

Scan with the camera

When you tap CONTINUE, the mobile phone displays a QR code. Hold the camera 15 to 20 cm in front of the mobile phone for the camera to scan the QR code.

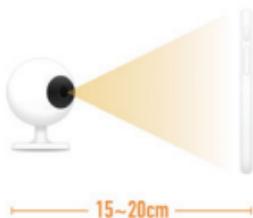

Continue



Heard nothing at all

Heard the beep

- 5 When connecting, you should make sure your router, mobile, and camera are as close as possible. When camera added successfully, click "√" you could also DIY the camera's name.


Connecting

Make sure your router, mobile, and device are as close as possible





- ✓ Device found
- ✓ Register device to the smart cloud
- ✓ Initializing device

Device added successfully

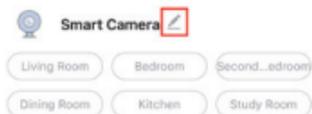

Settings

In "Smart Camera" interface,click "⌘",you can set the camera common functions.

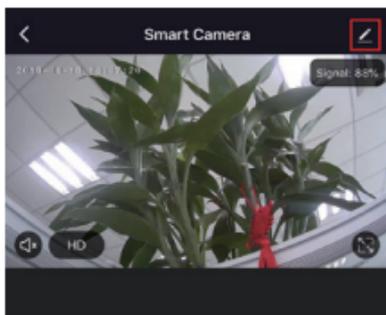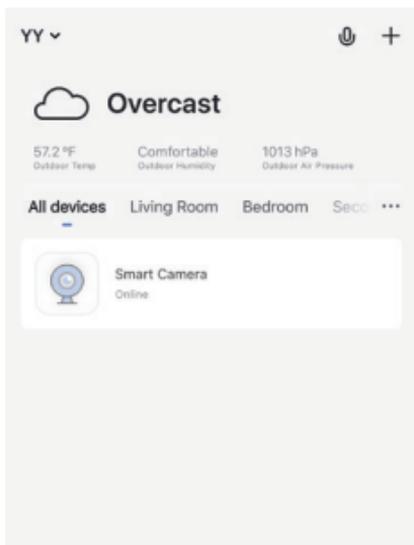

Snapshot

Speak

Record

Functions

Full-duplex audio

When the visitor push the doorbell button, you will get a call. You can see and hear the vistor in your App from the doorbell if you answer.

Motion detection

Motion sensors will notify you when movement is detected.

Shared device


The doorbell device can be shared with friends, and friends can also preview online. There is no limit to the number of sharing devices, but only 6 accounts are supported for online preview at the same time.

Record

Record every moment using high capacity SD card storage.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.

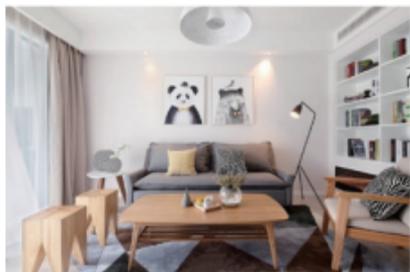

Daytime



Night

FAQ

Q: In the network process, the process bar is always not 100%, add failure?

A: This camera only supports 2.4GHz WiFi router, please make sure you are using a 2.4GHz WiFi router. And confirm the WiFi password again.

Q: Repeated additions are failures?

A: After adding a failure, it is recommended to restart the device or power off, and then try to add again.

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.