




LEGATE[™]
Smart home

SMART CAMERA


Manual Guide

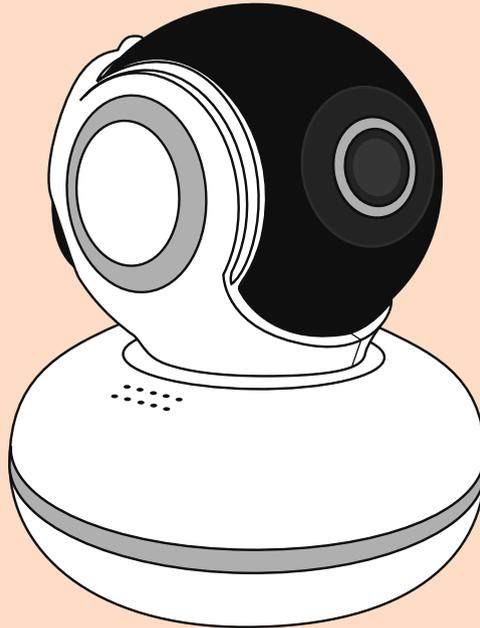

Legate Smart Home Security System



Let's Get Started.



Install the app

Download the **Legate Smart Home** app from Google Play or the App Store on a compatible phone or tablet.



Register and login

Register on the app by using your contact number or Email address.




Connect to wifi

Make sure that your mobile phone and smart device are connected to 2.4 GHz wifi network.

*note: The distance between the phone and smart device should not be greater than 4meters while pairing both devices. If the signal is week you'll need a wifi booster. (Recommended Wifi Booster Version: **TP LINK TL-WA855RE**)

**Legate Smart Camera
to Legate Smart Home App**


Getting the Smart Device Ready

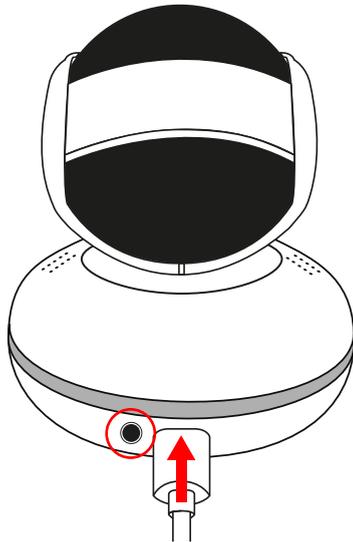

1

Insert the **USB Power Cord** on the Smart Camera's USB Port and plug the Power Adapter into a power outlet.

(note: You'll hear "Camera Start" voice which indicates the Smart Camera is ready to connect to Legate Smart Home app. If there's no voice, press and hold the Reset Button until a voice audio comes out)

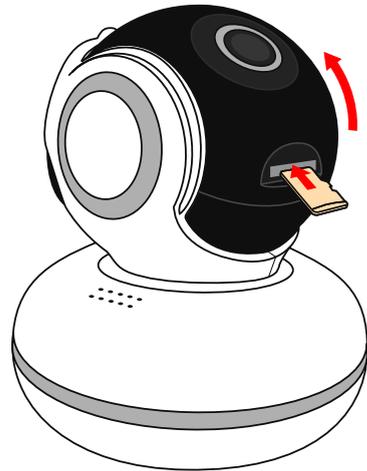


2

Insert **Micro SD Card** at the bottom part of the camera head.


(note: Maximum Micro SD Card capacity is 256GB)

Add Smart Device

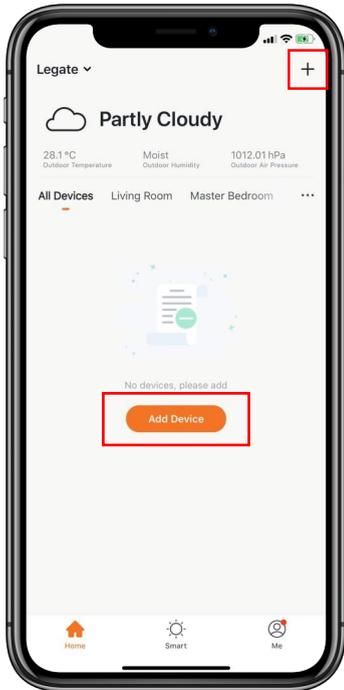

3


Open Legate Smart Home app,
Click “+” or **Add Device**.

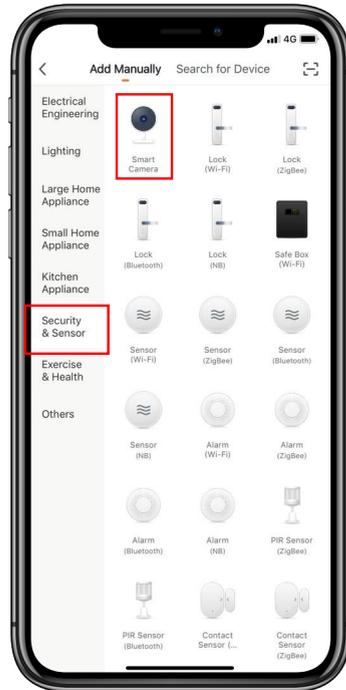

4


Under **“Security & Sensor”** tab
Click **“Smart Camera”**.

Network Configuration

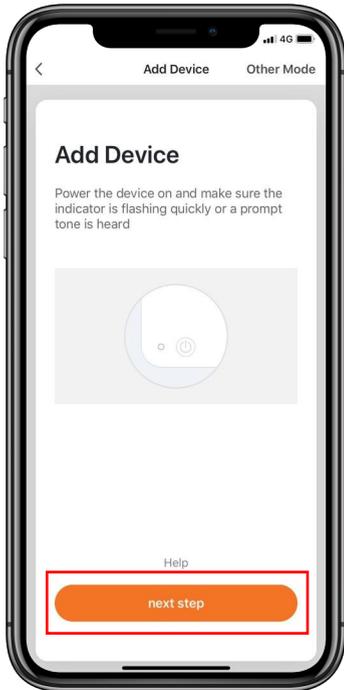

5

Click **“Next Step”** button.

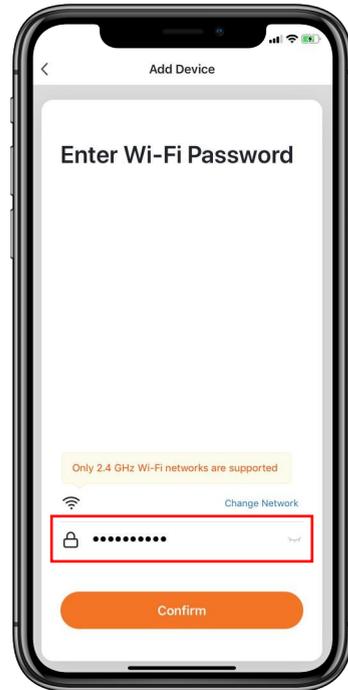

6

Enter your **Wifi Password**. Then click **“Confirm”** button.
(note: Only 2.4 GHz Wifi network are supported)

Network Configuration



7

Follow the instruction and click
“Continue” button.



8


After scanning the QR to the Smart
Camera, you will hear a beep sound.
Then click **“I Heard a Prompt”**

Network Configuration



9

Wait for the Smart Device connects to the app.


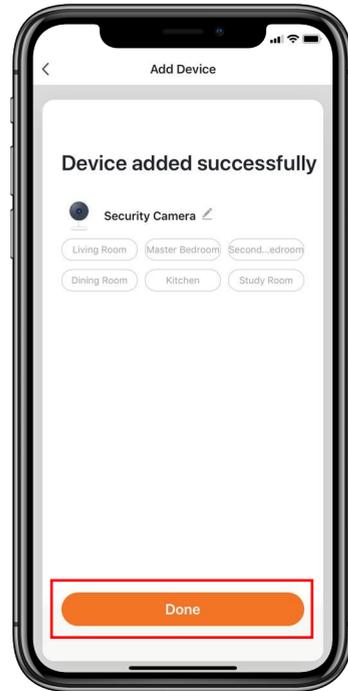


10

Click **“Done”** button when the Smart Device is successfully added.
(note: You can change the device’s name)

Legate Smart Camera Features

Main Function

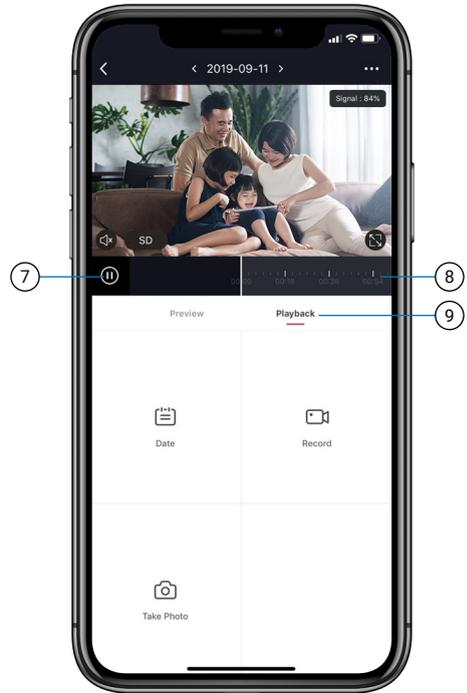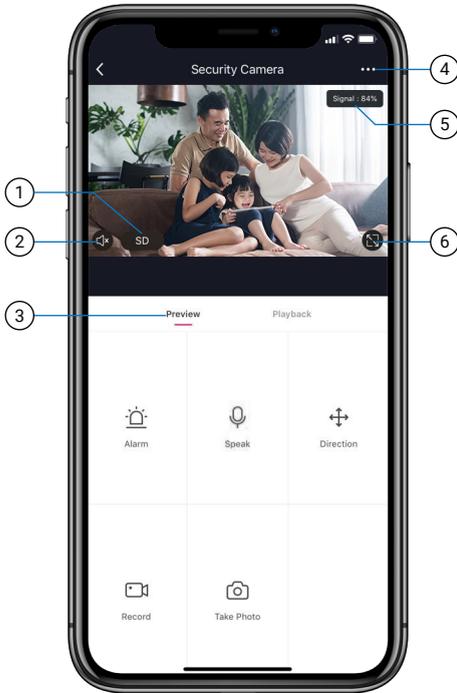


- 1. Preview Mode
- 2. Camera Volume
- 3. Live Preview
- 4. Settings
- 5. Connection Signal
- 6. Full Screen

- 7. Play or Pause
- 8. Video Timeline
- 9. Playback


Motion Detection

Enable to set the sensitivity level of the Smart Camera's motion detection.

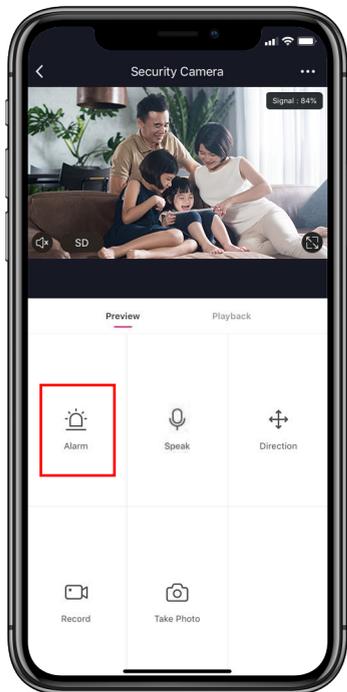

1

Click **"Alarm"** button.

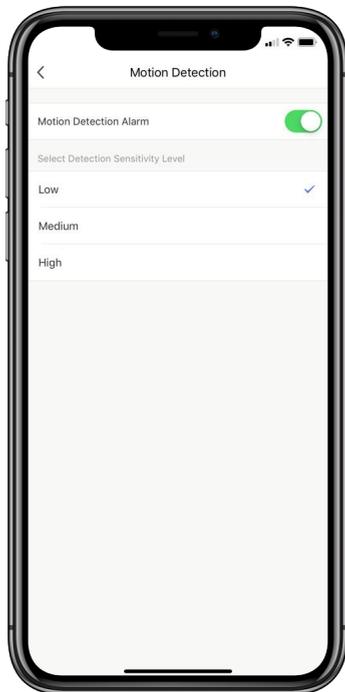

2

Select the Sensitivity level of motion detection.



3

Push Notification will be sent to your phone once the Smart Camera detects any movements.


Recording Mode

Enable to set the mode of video recording.




1

Click “...” button on upper right corner of Smart Camera main page.

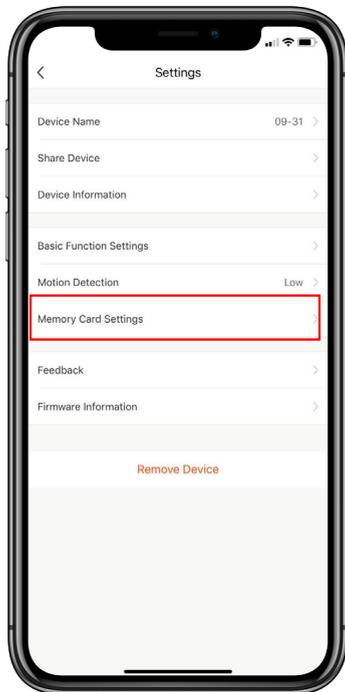

2

Click “**Memory Card Settings**” tab.

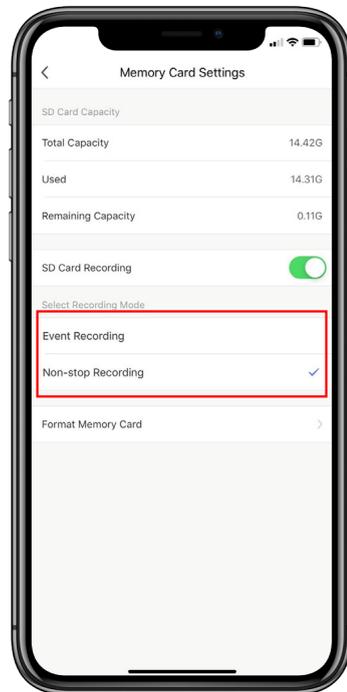


3

Select the **Recording Mode**.


Push Notification

Enable to turn off the notification.

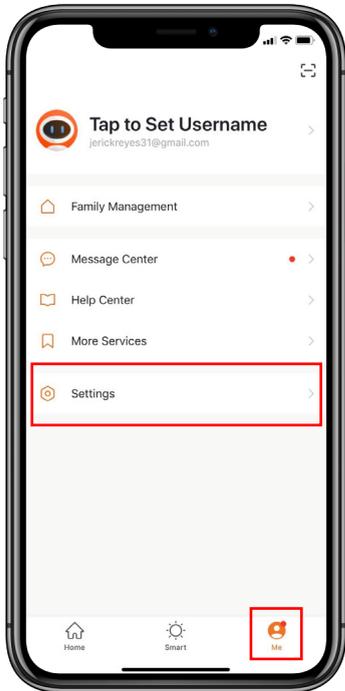


1

Click **"Me"** button on Legate Smart Home app. Then click **"Settings"**.

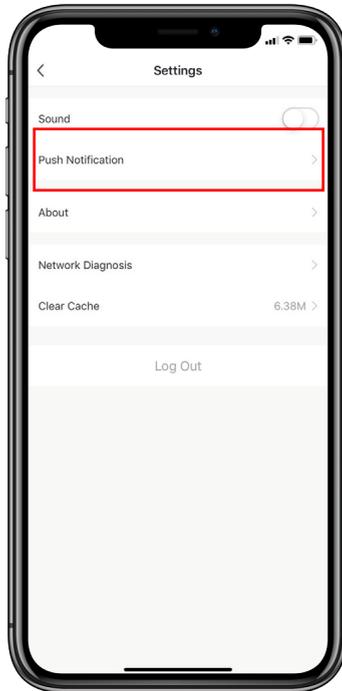

2

Click **"Push Notification"** tab.

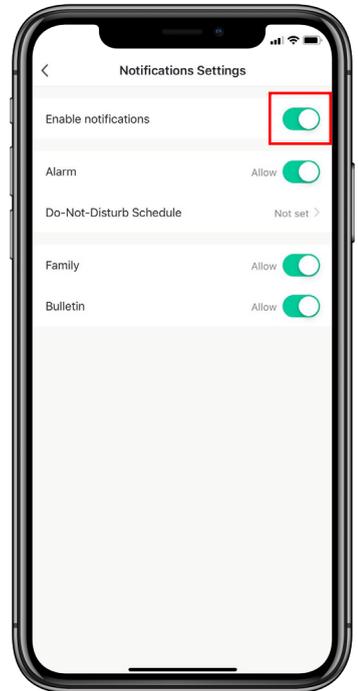

3

Can turn on or turn off the **"Enable notification"**


Remove Device from Legate Smart Home app

The device will restore to default settings.




1

Click “...” button on upper right corner of Smart Camera main page.

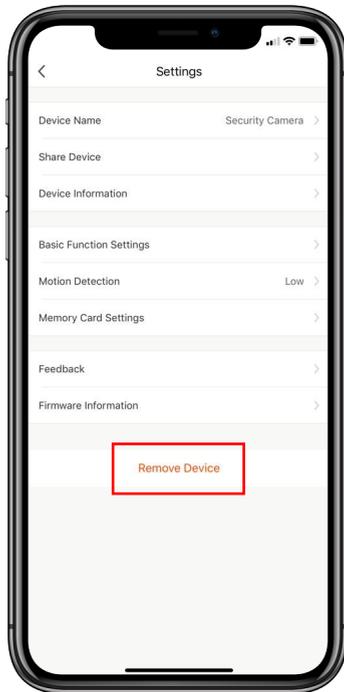

2

Click “**Remove Device**” tab.

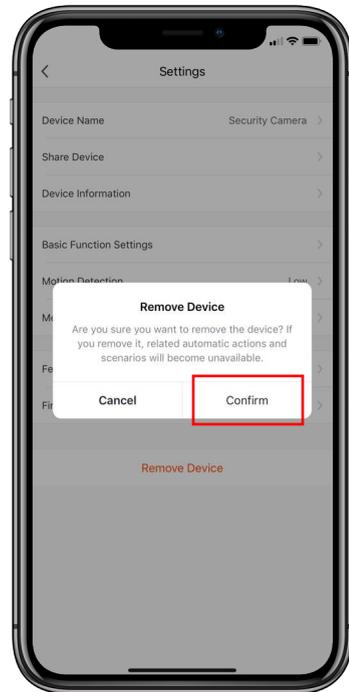


3

Click “**Confirm**” button to completely remove the device from the Legate Smart Home app.

Legate Smart Camera Configuration & Specifications

Product Configuration

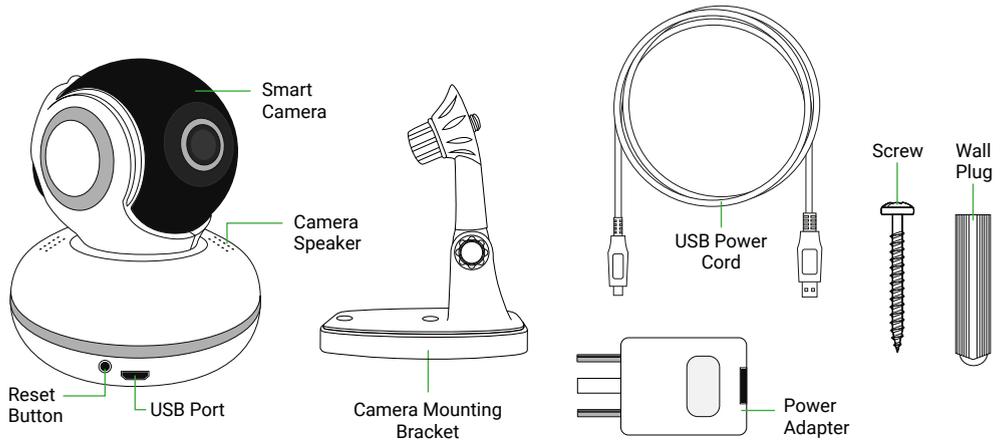

Factory Setting Reset:

Press and Hold the **Reset Button** for 10 seconds until “Factory Reset” voice audio comes out from the Smart Camera.

Specifications

Product Model	:	Smart Camera
Lens	:	110° wide angle
Pixel	:	1.0MP/2.0MP
Video Compression	:	H.264 High Profile
Image Enhancement	:	Digital Wide Dynamic 3D Noise Reduction
Local Storage	:	Micro SD Card
Wireless Encryption	:	WEP/WPA/WPA2 Encryption
Power Input	:	5V 1.6A
Total Power Consumption	:	3.5W (Max)
Wireless Standard	:	2.4G 802.11 b/g/n
Support systems	:	IOS 7.0 or above, Android 4.0 or above
Free App	:	Legate Smart Home



LEGATE[®]
Smart home

Your one stop shop for all your Smart Home needs

www.legate.com.sg